

SCHEDULED SERVICES - TURBO

1994 Mitsubishi 3000GT

1991-95 MAINTENANCE
Mitsubishi Maintenance & Service Intervals (Turbo)
3000GT

*** PLEASE READ THIS FIRST ***

- NOTE: All SERVICE SCHEDULES are listed for normal service vehicles. If vehicle is operated under severe service conditions, see SEVERE SERVICE REQUIREMENTS (PERFORM W/SERVICE SCHEDULES) for items requiring additional maintenance.
- NOTE: This article contains scheduled maintenance service information. Fluid types and capacities listed with each service in this article are only those necessary to perform that scheduled service. For specifications pertaining to fluid capacities for the entire vehicle, fuse and circuit breaker identification, wheel and tire size, battery type, warranty information, or model identification refer to the MAINTENANCE INFORMATION article in this section.

CAUTIONS & WARNINGS

SUPPLEMENTAL RESTRAINT SYSTEM (AIR BAG)

- NOTE: See the AIR BAGS article in the ACCESSORIES/SAFETY EQUIPMENT Section.
- Modifications or improper maintenance, including incorrect removal and installation of the Supplemental Restraint System (SRS), can adversely affect system performance. DO NOT cover, obstruct or change the steering wheel horn pad in any way, as such action could cause improper function of the system. Use only plain water when cleaning the horn pad. Solvents or cleaners could adversely affect the air bag cover and cause improper deployment of the system.
- WARNING: To avoid injury from accidental air bag deployment, read and carefully follow all warnings and service precautions. See appropriate AIR BAGS article in ACCESSORIES/SAFETY EQUIPMENT.
- CAUTION: Disconnect negative battery cable before servicing any air bag system, steering column or passenger side dash component. After any repair, turn ignition key to the ON position from passenger's side of vehicle in case of accidental air bag inflation

AIR CONDITIONING SERVICING

- CAUTION: Avoid breathing R-134a refrigerant and PAG lubricant vapors, exposure may irritate eyes, nose and throat. To remove R-134a from system use R-134a recycling equipment that meets SAE J2210 specifications. If accidental system discharge occurs, ventilate work area before resuming service.
- WARNING: R-134a service equipment or vehicle A/C systems SHOULD NOT be pressure tested or leak tested with compressed air. Some mixtures of air/R134a have shown to be combustible at

elevated pressures. These mixtures are dangerous and may cause fire and/or explosions. See AIR CONDITIONING SERVICE article in GENERAL INFORMATION section.

ANTI-LOCK BRAKE SYSTEM

The anti-lock brake system contains electronic equipment that can be susceptible to interference caused by improperly installed or high output radio transmitting equipment. Since this interference could cause the possible loss of the anti-lock braking capability, such equipment should be installed by qualified professionals.

On models equipped with anti-lock brake systems, ALWAYS observe the following cautions:

- * DO NOT attempt to bleed hydraulic system without first referring to the appropriate ANTI-LOCK BRAKE SYSTEM article in the BRAKES Section.
- * DO NOT mix tire sizes. As long as tires remain close to the original diameter, increasing the width is acceptable. Rolling diameter must be identical for all 4 tires. Some manufacturers recommend tires of the same brand, style and type. Failure to follow this precaution may cause inaccurate wheel speed readings.
- * Use ONLY recommended brake fluids. DO NOT use silicone brake fluids in an ABS-equipped vehicle.

BATTERY WARNING

WARNING: When battery is disconnected, vehicles equipped with computers may lose memory data. When battery power is restored, driveability problems may exist on some vehicles. These vehicles may require a relearn procedure. See COMPUTER RELEARN PROCEDURES article in GENERAL INFORMATION section.

REPLACING BLOWN FUSES

Before replacing a blown fuse, remove ignition key, turn off all lights and accessories to avoid damaging the electrical system. Be sure to use fuse with the correct indicated amperage rating. The use of an incorrect amperage rating fuse may result in a dangerous electrical system overload.

BRAKE PAD WEAR INDICATOR

Indicator will cause a squealing or scraping noise, warning that brake pads need replacement.

CATALYTIC CONVERTER

Continued operation of vehicle with a severe malfunction could cause converter to overheat, resulting in possible damage to converter and vehicle.

Any modification to the exhaust system on turbo models, which reduces exhaust backpressure, will lead to lean fuel mixtures and excessive spark advance. This could cause serious engine damage.

ELECTROSTATIC DISCHARGE SENSITIVE (ESD) PARTS

WARNING: Many solid state electrical components can be damaged by static electricity (ESD). Some will display a warning label, but many will not. Discharge personal static electricity by

touching a metal ground point on the vehicle prior to servicing any ESD sensitive component.

ENGINE OIL

CAUTION: Never use non-detergent or straight mineral oil.

FUEL SYSTEM SERVICE

WARNING: Relieve fuel system pressure prior to servicing any fuel system component (fuel injection models).

HALOGEN BULBS

Halogen bulbs contain pressurized gas which may explode if overheated. DO NOT touch glass portion of bulb with bare hands. Eye protection should be worn when handling or working around halogen bulbs.

RADIATOR CAP

CAUTION: Always disconnect the fan motor when working near the radiator fan. The fan is temperature controlled and could start at any time even when the ignition key is in the OFF position. DO NOT loosen or remove radiator cap when cooling system is hot.


RADIATOR FAN

WARNING: Keep hands away from radiator fan. Fan is controlled by a thermostatic switch which may come on or run for up to 15 minutes even after engine is turned off.

TURBOCHARGED MODELS

CAUTION: Do not race engine immediately after starting. When stopping engine, allow engine to idle for approximately 60 seconds before shutting it off. Failure to do so may cause turbocharger damage due to lack of oil flowing to the turbocharger bearings.

SERVICE POINT LOCATIONS

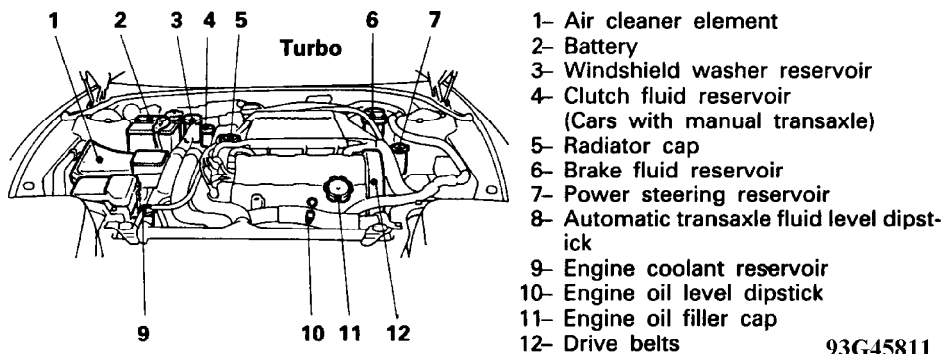

93G45811

Fig. 1: Service Point Locations (Turbo)
Courtesy of Mitsubishi Motor Sales of America.

CAMSHAFT TIMING BELT REPLACEMENT INFORMATION

CAUTION: Failure to replace a faulty camshaft timing belt may result in serious engine damage.

The condition of camshaft drive belts should always be checked on vehicles which have more than 50,000 miles. Although some manufacturers do not recommend belt replacement at a specified mileage, others require it at 60,000-100,000 miles. A camshaft drive belt failure may cause extensive damage to internal engine components on most engines, although some designs do not allow piston-to-valve contact. These designs are often called "Free Wheeling".

Many manufacturers changed their maintenance and warranty schedules in the mid-1980's to reflect timing belt inspection and/or replacement at 50,000-60,000 miles. Most service interval schedules in this manual reflect these changes.

Belts or components should be inspected and replaced if any of the following conditions exist:

- * Cracks Or Tears In Belt Surface
- * Missing, Damaged, Cracked Or Rounded Teeth
- * Oil Contamination
- * Damaged Or Faulty Tensioners
- * Incorrect Tension Adjustment

Replace camshaft timing belt every 60,000 miles.

SPARK PLUG REPLACEMENT INTERVALS

Spark plug replacement intervals, if given, are for Original Equipment Manufacturer (OEM) installed or specified plugs. If vehicle is equipped with platinum type or other non-OEM type spark plugs, follow replacement interval specified by spark plug manufacturer.

SEVERE & NORMAL SERVICE DEFINITIONS

NOTE: Use the Severe Service schedule if the vehicle to be serviced is operated under ANY (one or more) of these conditions:

Service is recommended at mileage intervals based on vehicle operation. Service schedules are based on the following primary operating conditions:

Severe Service

- * Dusty Conditions
- * Extensive Idling
- * Short Trip Operation At Freezing Temperatures (Engine Not Thoroughly Warmed Up)
- * Trailer Towing Or Commercial Use
- * Driving Off-Road Or In Salty Or Sandy Areas
- * More Than 50% Operation In Heavy City Traffic During Hot Weather Above 90°F (32°C)

Normal Service

- * Driven More Than 10 Miles Daily
- * No Severe Service Operating Conditions

SEVERE SERVICE REQUIREMENTS (PERFORM W/SERVICE SCHEDULES)

NOTE: The following services are to be performed on vehicles

subjected to severe service. See SEVERE & NORMAL SERVICE DEFINITIONS. This service is to be performed in addition to the normal services listed in the NORMAL MAINTENANCE SERVICE SCHEDULES.

SEVERE SERVICE CONDITIONS/ACTIONS TABLE

Condition	Action	Item	Perform Every (1)
Dusty Conditions	Replace	Engine Oil	3,000 Miles or 3 Months
	Replace	Engine Oil Filter	6,000 Miles or 6 Months
	Replace	Spark Plugs	15,000 Miles
Extensive Idling	Replace	Engine Oil	3,000 Miles or 3 Months
	Replace	Engine Oil Filter	6,000 Miles or 6 Months
	Replace	Spark Plugs	15,000 Miles
Short Trip Operation At Freezing Temperatures (Engine Not Thoroughly Warmed Up)	Replace	Engine Oil	3,000 Miles or 3 Months
	Replace	Engine Oil Filter	6,000 Miles or 6 Months
	Replace	Spark Plugs	15,000 Miles
Trailer Towing Or Commercial Use	Replace	Engine Oil	3,000 Miles or 3 Months
	Replace	Engine Oil Filter	6,000 Miles or 6 Months
	Replace	Spark Plugs	15,000 Miles
Driving Off-Road Or In Salty Or Sandy Areas	Replace	Engine Oil	3,000 Miles or 3 Months
	Replace	Engine Oil Filter	6,000 Miles or 6 Months
	Replace	Spark Plugs	15,000 Miles
More Than 50% Operation In Heavy City Traffic During Hot Weather Above 90°F (32°C)	Replace	Engine Oil	3,000 Miles or 3 Months
	Replace	Engine Oil Filter	6,000 Miles or 6 Months
	Replace	Spark Plugs	15,000 Miles
(1) - Perform these services at the mileage or number of months (since the last time), whichever comes first.			

NORMAL MAINTENANCE SERVICE SCHEDULES (TURBO)

The following service schedules refer to vehicles driven under normal operating conditions. For vehicles driven under severe conditions, additional services may be necessary. See SEVERE SERVICE

REQUIREMENTS (PERFORM W/SERVICE SCHEDULES) above in this article for additional service requirements.

5000 MILE (8000 KM) SERVICE

5000 MILE (8000 KM) SERVICE

Service Or Inspect	
	Check Fluid Levels
	Check Cooling System Hoses and Clamps
	Check Exhaust System & Heat Shielding
	Check Steering Rack Boots
	Inspect C/V Joint Boots
	Lubricate Steering Linkage & Suspension
	Rotate Tires and Adjust Air Pressure (Including Spare)
Replace	
	Engine Oil
	Oil Filter
Lubrication Specifications	
Application	Specification
Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C) SAE 20W-40 API SG Or SG/CD
Greater Than -10°F (-23°C) SAE 10W-30 API SG Or SG/CD
Maximum Temperature	
Less Than 60°F (16°C) SAE 5W-30 API SG Or SG/CD
Fluid Capacities	
Application	(1) Quantity
Engine Oil (W/Oil Cooler) 4.9 Qts. (4.6L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	

10,000 MILE (16,000 KM) SERVICE

10,000 MILE (16,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Check Fluid Levels
	Check Cooling System Hoses and Clamps

	Check Exhaust System & Heat Shielding
	Check C/V Joint Boots
	Check Operation of Horn, Wipers/Washers & All Exterior Lights
	Inspect Condition of Wiper Blades
	Check Headlight Alignment
	Check Seat Belt Webbing and Release Mechanisms
	Check Parking Brake Operation
	Check Shift/Clutch Interlock Operation
	Lubricate Weatherstripping with Silicone
	Lubricate Door Hinges
	Lubricate Door Locks
	Lubricate Suspension
Replace	
	Engine Oil
	Oil Filter
Lubrication Specifications	
Application Specification	
Brake & Clutch Reservoir Dot 3 Brake Fluid	
Cooling System Fluid 50/50 Ethylene-Glycol/Water Mix	
Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C) SAE 20W-40 Or 20W-50 API SH/CD	
Greater Than -10°F (-23°C) SAE 10W-30, 10W-40 Or 10W-50 API SH/CD	
Maximum Temperature	
Less Than 60°F (16°C) SAE 5W-30 API SH/CD	
Power Steering Fluid Dexron-IIe ATF	
Manual Transaxle SAE 75W-90W Or 75W-85W API Classification GL-4 Or Higher	
Automatic Transaxle Mopar 7176 ATF PLUS	
Wheel Lug Nut Torque	
Polycast Steel Type 65-80 ft. lbs. (90-110 N.m)	
Aluminum Wheels 85-100 ft. lbs. (120-140 N.m)	
Fluid Capacities	
Application (1) Quantity	
Cooling System 8.45 Qts. (8.0L)	
Automatic Transaxle 7.9 Qts. (7.5L)	
Manual Transaxle 2.4 Qts. (2.3L)	
Engine Oil 4.5 Qts. (4.3L)	
Engine Oil (W/Oil Cooler) 4.9 Qts. (4.6L)	
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	

15,000 MILE (24,000 KM) SERVICE

15,000 MILE (24,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Check Fluid Levels
	Check Cooling System Hoses and Clamps
	Check Coolant Strength
	Check Exhaust System & Heat Shielding
	Clean Battery and Battery Terminals
	Check C/V Joint Boots
	Check Steering Rack Boots
	Lubricate Steering Linkage & Suspension
	Inspect Front Brake Pads & Rotors
	Lubricate Caliper Slide Rails
	Inspect Rear Brake Linings & Drums
	Inspect Brake System Hoses & Lines
	Inspect Shocks/Struts for Leakage
	Inspect Tire Wear Pattern
	Rotate Tires and Adjust Air Pressure (Including Spare)
Replace	
	Engine Oil
	Oil Filter
	Automatic Transaxle Fluid
Lubrication Specifications	
Application	Specification
Brake & Clutch Reservoir	Dot 3 Brake Fluid
Cooling System Fluid	50/50 Ethylene-Glycol/Water Mix
Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C)	SAE 20W-40 Or 20W-50 API SH/CD
Greater Than -10°F (-23°C)	SAE 10W-30, 10W-40 Or
	10W-50 API SH/CD
Maximum Temperature	
Less Than 60°F (16°C)	SAE 5W-30 API SH/CD
Power Steering Fluid	Dexron-IIe ATF

Manual Transaxle	SAE 75W-90W Or 75W-85W API Classification GL-4 Or Higher
Automatic Transaxle	Mopar 7176 ATF PLUS
Rear Drive Axles	
Minimum Temperature	
More Than -10°F (-23°C)	SAE 90, 85W-90 Or 80W-90 API Classification GL-5 Or Higher
More Than -30°F to -10°F (-34°C to -23°C)	SAE 80W, Or 80W-90 API Classification GL-5 Or Higher
Maximum Temperature	
Less Than -30°F (-34°C)	SAE 75W API GL-5 Or Higher
Transfer Case	Mopar Hypoid Gear Oil Or Equivalent SAE 75W-90W Or 75W-85W API GL-4 Or Higher
Wheel Lug Nut Torque	
Polycast Steel Type	65-80 ft. lbs. (90-110 N.m)
Aluminum Wheels	85-100 ft. lbs. (120-140 N.m)
Fluid Capacities	
Application	(1) Quantity
Cooling System	8.45 Qts. (8.0L)
Automatic Transaxle	7.9 Qts. (7.5L)
Manual Transaxle	2.4 Qts. (2.3L)
Engine Oil	4.5 Qts. (4.3L)
Engine Oil (W/Oil Cooler)	4.9 Qts. (4.6L)
Transfer Case42 Qt. (.4L)
Differential (Rear Axle)	1.2 Qts. (1.1L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	

20,000 MILE (32,000 KM) SERVICE

20,000 MILE (32,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Check Fluid Levels
	Check Cooling System Hoses and Clamps
	Check Exhaust System & Heat Shielding
	Check C/V Joint Boots
	Check Operation of Horn, Wipers/Washers & All Exterior Lights
	Inspect Condition of Wiper Blades
	Check Headlight Alignment
	Check Seat Belt Webbing and Release Mechanisms
	Check Parking Brake Operation
	Check Shift/Clutch Interlock Operation

	Check Battery Fluid Level (SHO Only)
	Lubricate Weatherstripping with Silicone
	Lubricate Door Hinges
	Lubricate Door Locks
	Lubricate Suspension
	Replace
	Engine Oil
	Oil Filter
Lubrication Specifications	
Application	Specification
Brake & Clutch Reservoir	Dot 3 Brake Fluid
Cooling System Fluid	50/50 Ethylene-Glycol/Water Mix
Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C)	SAE 20W-40 Or 20W-50 API SH/CD
Greater Than -10°F (-23°C)	SAE 10W-30, 10W-40 Or 10W-50 API SH/CD
Maximum Temperature	
Less Than 60°F (16°C)	SAE 5W-30 API SH/CD
Power Steering Fluid	Dexron-IIe ATF
Manual Transaxle	SAE 75W-90W Or 75W-85W API Classification GL-4 Or Higher
Automatic Transaxle	Mopar 7176 ATF PLUS
Wheel Lug Nut Torque	
Polycast Steel Type	65-80 ft. lbs. (90-110 N.m)
Aluminum Wheels	85-100 ft. lbs. (120-140 N.m)
Fluid Capacities	
Application	(1) Quantity
Cooling System	8.45 Qts. (8.0L)
Automatic Transaxle	7.9 Qts. (7.5L)
Manual Transaxle	2.4 Qts. (2.3L)
Engine Oil	4.5 Qts. (4.3L)
Engine Oil (W/Oil Cooler)	4.9 Qts. (4.6L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	

25,000 MILE (40,000 KM) SERVICE

25,000 MILE (40,000 KM) SERVICE

	Service Or Inspect
	Verify Last Major Service Was Performed
	Check Fluid Levels

	Check Cooling System Hoses and Clamps
	Check Exhaust System & Heat Shielding
	Check Steering Rack Boots
	Inspect C/V Joint Boots
	Lubricate Steering Linkage & Suspension
	Rotate Tires and Adjust Air Pressure (Including Spare)
Replace	
	Engine Oil
	Oil Filter
Lubrication Specifications	
Application Specification	
Brake & Clutch Reservoir Dot 3 Brake Fluid	
Cooling System Fluid 50/50 Ethylene-Glycol/Water Mix	
Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C) SAE 20W-40 Or 20W-50 API SH/CD	
Greater Than -10°F (-23°C) SAE 10W-30, 10W-40 Or 10W-50 API SH/CD	
Maximum Temperature	
Less Than 60°F (16°C) SAE 5W-30 API SH/CD	
Power Steering Fluid Dexron-IIe ATF	
Manual Transaxle SAE 75W-90W Or 75W-85W API Classification GL-4 Or Higher	
Automatic Transaxle Mopar 7176 ATF PLUS	
Wheel Lug Nut Torque	
Polycast Steel Type 65-80 ft. lbs. (90-110 N.m)	
Aluminum Wheels 85-100 ft. lbs. (120-140 N.m)	
Fluid Capacities	
Application (1) Quantity	
Cooling System 8.45 Qts. (8.0L)	
Automatic Transaxle 7.9 Qts. (7.5L)	
Manual Transaxle 2.4 Qts. (2.3L)	
Engine Oil 4.5 Qts. (4.3L)	
Engine Oil (W/Oil Cooler) 4.9 Qts. (4.6L)	
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	

30,000 MILE (48,000 KM) SERVICE

30,000 MILE (48,000 KM) SERVICE

Service Or Inspect
Verify Last Major Service Was Performed
Check Fluid Levels

	Check Cooling System Hoses and Clamps
	Check Coolant Strength
	Check Exhaust System & Heat Shielding
	Clean Battery and Battery Terminals
	Inspect C/V Joint Boots
	Tension On Drive Belts
	Manual Transaxle Oil
	Check Steering Rack Boots
	Fuel Lines & Hoses
	Front Suspension Ball Joints (Lubricate)
	Suspension Bushings, Springs, Arms & Rear Jounce Bumpers
	Parking Brake System
	Lubricate Steering Linkage & Suspension
	Inspect Front Brake Pads & Rotors
	Lubricate Caliper Slide Rails
	Inspect Rear Brake Linings & Drums
	Inspect Brake System Hoses & Lines
	Inspect Shocks/Struts for Leakage
	Inspect Tire Wear Pattern
	Rotate Tires and Adjust Air Pressure (Including Spare)
	Replace
	Engine Oil
	Oil Filter
	Air Cleaner Element
	Spark Plugs
	Automatic Transaxle Fluid
	Front & Rear Axle Fluid (AWD)
	Drain, Flush and Refill Engine Coolant
Lubrication Specifications	
Application	Specification
Brake & Clutch Reservoir	Dot 3 Brake Fluid
Cooling System Fluid	50/50 Ethylene-Glycol/Water Mix

Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C)	SAE 20W-40 Or 20W-50 API SH/CD
Greater Than -10°F (-23°C)	SAE 10W-30, 10W-40 Or 10W-50 API SH/CD
Maximum Temperature	
Less Than 60°F (16°C)	SAE 5W-30 API SH/CD
Power Steering Fluid	
Dexron-IIe ATF	
Manual Transaxle	
SAE 75W-90W Or 75W-85W API	
Classification GL-4 Or Higher	
Automatic Transaxle	
Mopar 7176 ATF PLUS	
Rear Drive Axles	
Minimum Temperature	
More Than -10°F (-23°C)	SAE 90, 85W-90 Or 80W-90 API
Classification GL-5 Or Higher	
More Than -30°F to -10°F	
(-34°C to -23°C)	
SAE 80W, Or 80W-90 API	
Classification GL-5 Or Higher	
Maximum Temperature	
Less Than -30°F (-34°C)	SAE 75W API GL-5 Or Higher
Transfer Case	
Mopar Hypoid Gear Oil Or Equivalent	
SAE 75W-90W Or 75W-85W API GL-4 Or Higher	
Wheel Lug Nut Torque	
Polycast Steel Type	65-80 ft. lbs. (90-110 N.m)
Aluminum Wheels	85-100 ft. lbs. (120-140 N.m)
Fluid Capacities	
Application	(1) Quantity
Cooling System	8.45 Qts. (8.0L)
Automatic Transaxle	7.9 Qts. (7.5L)
Manual Transaxle	2.4 Qts. (2.3L)
Engine Oil	4.5 Qts. (4.3L)
Engine Oil (W/Oil Cooler)	4.9 Qts. (4.6L)
Transfer Case	.42 Qt. (.4L)
Differential (Rear Axle)	1.2 Qts. (1.1L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
Service Labor Times	
Application	Hours
3.0L DOHC Turbo	2.6

35,000 MILE (56,000 KM) SERVICE

35,000 MILE (56,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Check Fluid Levels
	Check Cooling System Hoses and Clamps
	Check Exhaust System & Heat Shielding

	Check Steering Rack Boots
	Inspect C/V Joint Boots
	Lubricate Steering Linkage & Suspension
	Rotate Tires and Adjust Air Pressure (Including Spare)
	Replace
	Engine Oil
	Oil Filter
Lubrication Specifications	
Application	Specification
Brake & Clutch Reservoir	Dot 3 Brake Fluid
Cooling System Fluid	50/50 Ethylene-Glycol/Water Mix
Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C)	SAE 20W-40 Or 20W-50 API SH/CD
Greater Than -10°F (-23°C)	SAE 10W-30, 10W-40 Or 10W-50 API SH/CD
Maximum Temperature	
Less Than 60°F (16°C)	SAE 5W-30 API SH/CD
Power Steering Fluid	Dexron-IIe ATF
Manual Transaxle	SAE 75W-90W Or 75W-85W API Classification GL-4 Or Higher
Automatic Transaxle	Mopar 7176 ATF PLUS
Wheel Lug Nut Torque	
Polycast Steel Type	65-80 ft. lbs. (90-110 N.m)
Aluminum Wheels	85-100 ft. lbs. (120-140 N.m)
Fluid Capacities	
Application	(1) Quantity
Cooling System	8.45 Qts. (8.0L)
Automatic Transaxle	7.9 Qts. (7.5L)
Manual Transaxle	2.4 Qts. (2.3L)
Engine Oil	4.5 Qts. (4.3L)
Engine Oil (W/Oil Cooler)	4.9 Qts. (4.6L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	

40,000 MILE (64,000 KM) SERVICE

40,000 MILE (64,000 KM) SERVICE

	Service Or Inspect
	Verify Last Major Service Was Performed
	Check Fluid Levels
	Check Cooling System Hoses and Clamps

	Check Exhaust System & Heat Shielding
	Check C/V Joint Boots
	Check Operation of Horn, Wipers/Washers & All Exterior Lights
	Inspect Condition of Wiper Blades
	Check Headlight Alignment
	Check Seat Belt Webbing and Release Mechanisms
	Check Parking Brake Operation
	Check Shift/Clutch Interlock Operation
	Lubricate Weatherstripping with Silicone
	Lubricate Door Hinges
	Lubricate Door Locks
	Lubricate Suspension
Replace	
	Engine Oil
	Oil Filter
Lubrication Specifications	
Application	Specification
Brake & Clutch Reservoir	Dot 3 Brake Fluid
Cooling System Fluid	50/50 Ethylene-Glycol/Water Mix
Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C)	SAE 20W-40 Or 20W-50 API SH/CD
Greater Than -10°F (-23°C)	SAE 10W-30, 10W-40 Or 10W-50 API SH/CD
Maximum Temperature	
Less Than 60°F (16°C)	SAE 5W-30 API SH/CD
Power Steering Fluid	Dexron-IIe ATF
Manual Transaxle	SAE 75W-90W Or 75W-85W API Classification GL-4 Or Higher
Automatic Transaxle	Mopar 7176 ATF PLUS
Wheel Lug Nut Torque	
Polycast Steel Type	65-80 ft. lbs. (90-110 N.m)
Aluminum Wheels	85-100 ft. lbs. (120-140 N.m)
Fluid Capacities	
Application	(1) Quantity
Cooling System	8.45 Qts. (8.0L)
Automatic Transaxle	7.9 Qts. (7.5L)
Manual Transaxle	2.4 Qts. (2.3L)
Engine Oil	4.5 Qts. (4.3L)
Engine Oil (W/Oil Cooler)	4.9 Qts. (4.6L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	

45,000 MILE (72,000 KM) SERVICE

45,000 MILE (72,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Check Fluid Levels
	Check Cooling System Hoses and Clamps
	Check Coolant Strength
	Check Exhaust System & Heat Shielding
	Check Battery Fluid Level (SHO Only)
	Clean Battery and Battery Terminals
	Check C/V Joint Boots
	Check Steering Rack Boots
	Automatic Transaxle Fluid
	Lubricate Steering Linkage & Suspension
	Inspect Front Brake Pads & Rotors
	Lubricate Caliper Slide Rails
	Inspect Rear Brake Linings & Drums
	Inspect Brake System Hoses & Lines
	Inspect Shocks/Struts for Leakage
	Inspect Tire Wear Pattern
	Rotate Tires and Adjust Air Pressure (Including Spare)
Replace	
	Engine Oil
	Oil Filter
Lubrication Specifications	
Application	Specification
Brake & Clutch Reservoir	Dot 3 Brake Fluid
Cooling System Fluid	50/50 Ethylene-Glycol/Water Mix
Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C)	SAE 20W-40 Or 20W-50 API SH/CD
Greater Than -10°F (-23°C)	SAE 10W-30, 10W-40 Or
	10W-50 API SH/CD
Maximum Temperature	

Less Than 60°F (16°C)	SAE 5W-30 API SH/CD
Power Steering Fluid	Dexron-IIe ATF
Manual Transaxle	SAE 75W-90W Or 75W-85W API Classification GL-4 Or Higher
Automatic Transaxle	Mopar 7176 ATF PLUS
Rear Drive Axles	
Minimum Temperature	
More Than -10°F (-23°C)	SAE 90, 85W-90 Or 80W-90 API Classification GL-5 Or Higher
More Than -30°F to -10°F (-34°C to -23°C)	SAE 80W, Or 80W-90 API Classification GL-5 Or Higher
Maximum Temperature	
Less Than -30°F (-34°C)	SAE 75W API GL-5 Or Higher
Transfer Case	Mopar Hypoid Gear Oil Or Equivalent SAE 75W-90W Or 75W-85W API GL-4 Or Higher
Wheel Lug Nut Torque	
Polycast Steel Type	65-80 ft. lbs. (90-110 N.m)
Aluminum Wheels	85-100 ft. lbs. (120-140 N.m)

Fluid Capacities

Application	(1) Quantity
Cooling System	8.45 Qts. (8.0L)
Automatic Transaxle	7.9 Qts. (7.5L)
Manual Transaxle	2.4 Qts. (2.3L)
Engine Oil	4.5 Qts. (4.3L)
Engine Oil (W/Oil Cooler)	4.9 Qts. (4.6L)
Transfer Case	.42 Qt. (.4L)
Differential (Rear Axle)	1.2 Qts. (1.1L)

(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.

50,000 MILE (80,000 KM) SERVICE

50,000 MILE (80,000 KM) SERVICE

Service Or Inspect
Verify Last Major Service Was Performed
Check Fluid Levels
Check Cooling System Hoses and Clamps
Check Exhaust System & Heat Shielding
Check C/V Joint Boots
Check Operation of Horn, Wipers/Washers & All Exterior Lights
Inspect Condition of Wiper Blades
Check Headlight Alignment
Check Seat Belt Webbing and Release Mechanisms
Check Parking Brake Operation

	Check Shift/Clutch Interlock Operation
	Lubricate Weatherstripping with Silicone
	Lubricate Door Hinges
	Lubricate Door Locks
	Lubricate Suspension
	Replace
	Engine Oil
	Oil Filter
Lubrication Specifications	
Application	Specification
Brake & Clutch Reservoir	Dot 3 Brake Fluid
Cooling System Fluid	50/50 Ethylene-Glycol/Water Mix
Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C)	SAE 20W-40 Or 20W-50 API SH/CD
Greater Than -10°F (-23°C)	SAE 10W-30, 10W-40 Or 10W-50 API SH/CD
Maximum Temperature	
Less Than 60°F (16°C)	SAE 5W-30 API SH/CD
Power Steering Fluid	Dexron-IIe ATF
Manual Transaxle	SAE 75W-90W Or 75W-85W API Classification GL-4 Or Higher
Automatic Transaxle	Mopar 7176 ATF PLUS
Wheel Lug Nut Torque	
Polycast Steel Type	65-80 ft. lbs. (90-110 N.m)
Aluminum Wheels	85-100 ft. lbs. (120-140 N.m)
Fluid Capacities	
Application	(1) Quantity
Cooling System	8.45 Qts. (8.0L)
Automatic Transaxle	7.9 Qts. (7.5L)
Manual Transaxle	2.4 Qts. (2.3L)
Engine Oil	4.5 Qts. (4.3L)
Engine Oil (W/Oil Cooler)	4.9 Qts. (4.6L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	

55,000 MILE (88,000 KM) SERVICE

55,000 MILE (88,000 KM) SERVICE

	Service Or Inspect
	Verify Last Major Service Was Performed
	Check Fluid Levels

	Check Cooling System Hoses and Clamps
	Check Exhaust System & Heat Shielding
	Check Steering Rack Boots
	Inspect C/V Joint Boots
	Lubricate Steering Linkage & Suspension
	Rotate Tires and Adjust Air Pressure (Including Spare)
Replace	
	Engine Oil
	Oil Filter
Lubrication Specifications	
Application	Specification
Brake & Clutch Reservoir	Dot 3 Brake Fluid
Cooling System Fluid	50/50 Ethylene-Glycol/Water Mix
Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C)	SAE 20W-40 Or 20W-50 API SH/CD
Greater Than -10°F (-23°C)	SAE 10W-30, 10W-40 Or 10W-50 API SH/CD
Maximum Temperature	
Less Than 60°F (16°C)	SAE 5W-30 API SH/CD
Power Steering Fluid	Dexron-IIe ATF
Manual Transaxle	SAE 75W-90W Or 75W-85W API Classification GL-4 Or Higher
Automatic Transaxle	Mopar 7176 ATF PLUS
Wheel Lug Nut Torque	
Polycast Steel Type	65-80 ft. lbs. (90-110 N.m)
Aluminum Wheels	85-100 ft. lbs. (120-140 N.m)
Fluid Capacities	
Application	(1) Quantity
Cooling System	8.45 Qts. (8.0L)
Automatic Transaxle	7.9 Qts. (7.5L)
Manual Transaxle	2.4 Qts. (2.3L)
Engine Oil	4.5 Qts. (4.3L)
Engine Oil (W/Oil Cooler)	4.9 Qts. (4.6L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	

60,000 MILE (96,000 KM) SERVICE

60,000 MILE (96,000 KM) SERVICE

Service Or Inspect
Verify Last Major Service Was Performed
Check Fluid Levels

	Check Cooling System Hoses and Clamps
	Check Coolant Strength
	Check Exhaust System & Heat Shielding
	Clean Battery and Battery Terminals
	Check C/V Joint Boots
	Check Steering Rack Boots
	Tension On Drive Belts
	Evaporative Emission Control System
	Front Suspension Ball Joints (Lubricate)
	Suspension Bushings, Springs, Arms & Rear Jounce Bumpers
	Repack Front Wheel Bearings (2WD Models)
	Parking Brake System
	Lubricate Throttle/Kick-Down Cable Ball Stud
	Lubricate Automatic Transmission Linkage
	Lubricate Steering Linkage & Suspension
	Lubricate Driveshaft U-Joint & Slip-Yoke
	Inspect Front Brake Pads & Rotors
	Lubricate Caliper Slide Rails
	Inspect Rear Brake Linings & Drums
	Inspect Brake System Hoses & Lines
	Inspect Shocks/Struts for Leakage
	Inspect Tire Wear Pattern
	Rotate Tires and Adjust Air Pressure (Including Spare)
	Replace
	Engine Oil
	Oil Filter
	Air Filter Element
	Spark Plugs
	Ignition Cables
	Camshaft Timing Belt
	Automatic Transaxle Fluid

	Front & Rear Axle Oil (AWD)
	Drain, Flush and Refill Engine Coolant
Lubrication Specifications	
Application	Specification
Brake & Clutch Reservoir	Dot 3 Brake Fluid
Cooling System Fluid	50/50 Ethylene-Glycol/Water Mix
Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C)	SAE 20W-40 Or 20W-50 API SH/CD
Greater Than -10°F (-23°C)	SAE 10W-30, 10W-40 Or 10W-50 API SH/CD
Maximum Temperature	
Less Than 60°F (16°C)	SAE 5W-30 API SH/CD
Power Steering Fluid	Dexron-IIIE ATF
Manual Transaxle	SAE 75W-90W Or 75W-85W API Classification GL-4 Or Higher
Automatic Transaxle	Mopar 7176 ATF PLUS
Rear Drive Axles	
Minimum Temperature	
More Than -10°F (-23°C)	SAE 90, 85W-90 Or 80W-90 API Classification GL-5 Or Higher
More Than -30°F to -10°F (-34°C to -23°C)	SAE 80W, Or 80W-90 API Classification GL-5 Or Higher
Maximum Temperature	
Less Than -30°F (-34°C)	SAE 75W API GL-5 Or Higher
Transfer Case	Mopar Hypoid Gear Oil Or Equivalent SAE 75W-90W Or 75W-85W API GL-4 Or Higher
Wheel Lug Nut Torque	
Polycast Steel Type	65-80 ft. lbs. (90-110 N.m)
Aluminum Wheels	85-100 ft. lbs. (120-140 N.m)
Fluid Capacities	
Application	(1) Quantity
Cooling System	8.45 Qts. (8.0L)
Automatic Transaxle	7.9 Qts. (7.5L)
Manual Transaxle	2.4 Qts. (2.3L)
Engine Oil	4.5 Qts. (4.3L)
Engine Oil (W/Oil Cooler)	4.9 Qts. (4.6L)
Transfer Case42 Qt. (.4L)
Differential (Rear Axle)	1.2 Qts. (1.1L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
Service Labor Times	
Application	Hours
3.0L DOHC Turbo	8.5

65,000 MILE (104,000 KM) SERVICE

65,000 MILE (104,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Check Fluid Levels
	Check Cooling System Hoses and Clamps
	Check Exhaust System & Heat Shielding
	Check Steering Rack Boots
	Inspect C/V Joint Boots
	Lubricate Steering Linkage & Suspension
	Rotate Tires and Adjust Air Pressure (Including Spare)
Replace	
	Engine Oil
	Oil Filter
Lubrication Specifications	
Application	Specification
Brake & Clutch Reservoir	Dot 3 Brake Fluid
Cooling System Fluid	50/50 Ethylene-Glycol/Water Mix
Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C)	SAE 20W-40 Or 20W-50 API SH/CD
Greater Than -10°F (-23°C)	SAE 10W-30, 10W-40 Or 10W-50 API SH/CD
Maximum Temperature	
Less Than 60°F (16°C)	SAE 5W-30 API SH/CD
Power Steering Fluid	Dexron-IIe ATF
Manual Transaxle	SAE 75W-90W Or 75W-85W API Classification GL-4 Or Higher
Automatic Transaxle	Mopar 7176 ATF PLUS
Wheel Lug Nut Torque	
Polycast Steel Type	65-80 ft. lbs. (90-110 N.m)
Aluminum Wheels	85-100 ft. lbs. (120-140 N.m)
Fluid Capacities	
Application	(1) Quantity
Cooling System	8.45 Qts. (8.0L)
Automatic Transaxle	7.9 Qts. (7.5L)
Manual Transaxle	2.4 Qts. (2.3L)
Engine Oil	4.5 Qts. (4.3L)
Engine Oil (W/Oil Cooler)	4.9 Qts. (4.6L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	

70,000 MILE (112,000 KM) SERVICE

70,000 MILE (112,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Check Fluid Levels
	Check Cooling System Hoses and Clamps
	Check Exhaust System & Heat Shielding
	Check C/V Joint Boots
	Check Operation of Horn, Wipers/Washers & All Exterior Lights
	Inspect Condition of Wiper Blades
	Check Headlight Alignment
	Check Seat Belt Webbing and Release Mechanisms
	Check Parking Brake Operation
	Check Shift/Clutch Interlock Operation
	Check Battery Fluid Level (SHO Only)
	Lubricate Weatherstripping with Silicone
	Lubricate Door Hinges
	Lubricate Door Locks
	Lubricate Suspension
Replace	
	Engine Oil
	Oil Filter
Lubrication Specifications	
Application	Specification
Brake & Clutch Reservoir	Dot 3 Brake Fluid
Cooling System Fluid	50/50 Ethylene-Glycol/Water Mix
Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C)	SAE 20W-40 Or 20W-50 API SH/CD
Greater Than -10°F (-23°C)	SAE 10W-30, 10W-40 Or
	10W-50 API SH/CD
Maximum Temperature	
Less Than 60°F (16°C)	SAE 5W-30 API SH/CD
Power Steering Fluid	Dexron-IIe ATF
Manual Transaxle	SAE 75W-90W Or 75W-85W API
	Classification GL-4 Or Higher
Automatic Transaxle	Mopar 7176 ATF PLUS
Wheel Lug Nut Torque	
Polycast Steel Type	65-80 ft. lbs. (90-110 N.m)
Aluminum Wheels	85-100 ft. lbs. (120-140 N.m)

Fluid Capacities

Application	(1) Quantity
Cooling System	8.45 Qts. (8.0L)
Automatic Transaxle	7.9 Qts. (7.5L)
Manual Transaxle	2.4 Qts. (2.3L)
Engine Oil	4.5 Qts. (4.3L)
Engine Oil (W/Oil Cooler)	4.9 Qts. (4.6L)

(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.

75,000 MILE (120,000 KM) SERVICE

75,000 MILE (120,000 KM) SERVICE

Service Or Inspect
Verify Last Major Service Was Performed
Check Fluid Levels
Check Cooling System Hoses and Clamps
Check Coolant Strength
Automatic Transaxle Fluid
Check Exhaust System & Heat Shielding
Clean Battery and Battery Terminals
Check C/V Joint Boots
Check Steering Rack Boots
Lubricate Steering Linkage & Suspension
Inspect Front Brake Pads & Rotors
Lubricate Caliper Slide Rails
Inspect Rear Brake Linings & Drums
Inspect Brake System Hoses & Lines
Inspect Shocks/Struts for Leakage
Inspect Tire Wear Pattern
Rotate Tires and Adjust Air Pressure (Including Spare)
Replace
Engine Oil
Oil Filter
Lubrication Specifications

Application	Specification
Brake & Clutch Reservoir	Dot 3 Brake Fluid
Cooling System Fluid	50/50 Ethylene-Glycol/Water Mix
Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C)	SAE 20W-40 Or 20W-50 API SH/CD
Greater Than -10°F (-23°C)	SAE 10W-30, 10W-40 Or 10W-50 API SH/CD
Maximum Temperature	
Less Than 60°F (16°C)	SAE 5W-30 API SH/CD
Power Steering Fluid	Dexron-IIe ATF
Manual Transaxle	SAE 75W-90W Or 75W-85W API Classification GL-4 Or Higher
Automatic Transaxle	Mopar 7176 ATF PLUS
Rear Drive Axles	
Minimum Temperature	
More Than -10°F (-23°C)	SAE 90, 85W-90 Or 80W-90 API Classification GL-5 Or Higher
More Than -30°F to -10°F (-34°C to -23°C)	SAE 80W, Or 80W-90 API Classification GL-5 Or Higher
Maximum Temperature	
Less Than -30°F (-34°C)	SAE 75W API GL-5 Or Higher
Transfer Case	Mopar Hypoid Gear Oil Or Equivalent SAE 75W-90W Or 75W-85W API GL-4 Or Higher
Wheel Lug Nut Torque	
Polycast Steel Type	65-80 ft. lbs. (90-110 N.m)
Aluminum Wheels	85-100 ft. lbs. (120-140 N.m)

Fluid Capacities

Application	(1) Quantity
Cooling System	8.45 Qts. (8.0L)
Automatic Transaxle	7.9 Qts. (7.5L)
Manual Transaxle	2.4 Qts. (2.3L)
Engine Oil	4.5 Qts. (4.3L)
Engine Oil (W/Oil Cooler)	4.9 Qts. (4.6L)
Transfer Case42 Qt. (.4L)
Differential (Rear Axle)	1.2 Qts. (1.1L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	

80,000 MILE (128,000 KM) SERVICE

80,000 MILE (128,000 KM) SERVICE

Service Or Inspect
Verify Last Major Service Was Performed
Check Fluid Levels
Check Cooling System Hoses and Clamps
Check Exhaust System & Heat Shielding
Check C/V Joint Boots

	Check Operation of Horn, Wipers/Washers & All Exterior Lights
	Inspect Condition of Wiper Blades
	Check Headlight Alignment
	Check Seat Belt Webbing and Release Mechanisms
	Check Parking Brake Operation
	Check Shift/Clutch Interlock Operation
	Lubricate Weatherstripping with Silicone
	Lubricate Door Hinges
	Lubricate Door Locks
	Lubricate Suspension
	Replace
	Engine Oil
	Oil Filter
Lubrication Specifications	
Application	Specification
Brake & Clutch Reservoir	Dot 3 Brake Fluid
Cooling System Fluid	50/50 Ethylene-Glycol/Water Mix
Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C)	SAE 20W-40 Or 20W-50 API SH/CD
Greater Than -10°F (-23°C)	SAE 10W-30, 10W-40 Or 10W-50 API SH/CD
Maximum Temperature	
Less Than 60°F (16°C)	SAE 5W-30 API SH/CD
Power Steering Fluid	Dexron-IIe ATF
Manual Transaxle	SAE 75W-90W Or 75W-85W API Classification GL-4 Or Higher
Automatic Transaxle	Mopar 7176 ATF PLUS
Wheel Lug Nut Torque	
Polycast Steel Type	65-80 ft. lbs. (90-110 N.m)
Aluminum Wheels	85-100 ft. lbs. (120-140 N.m)
Fluid Capacities	
Application	(1) Quantity
Cooling System	8.45 Qts. (8.0L)
Automatic Transaxle	7.9 Qts. (7.5L)
Manual Transaxle	2.4 Qts. (2.3L)
Engine Oil	4.5 Qts. (4.3L)
Engine Oil (W/Oil Cooler)	4.9 Qts. (4.6L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	

85,000 MILE (136,000 KM) SERVICE

85,000 MILE (136,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Check Fluid Levels
	Check Cooling System Hoses and Clamps
	Check Exhaust System & Heat Shielding
	Check Steering Rack Boots
	Inspect C/V Joint Boots
	Lubricate Steering Linkage & Suspension
	Rotate Tires and Adjust Air Pressure (Including Spare)
Replace	
	Engine Oil
	Oil Filter
Lubrication Specifications	
Application	Specification
Brake & Clutch Reservoir	Dot 3 Brake Fluid
Cooling System Fluid	50/50 Ethylene-Glycol/Water Mix
Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C)	SAE 20W-40 Or 20W-50 API SH/CD
Greater Than -10°F (-23°C)	SAE 10W-30, 10W-40 Or
	10W-50 API SH/CD
Maximum Temperature	
Less Than 60°F (16°C)	SAE 5W-30 API SH/CD
Power Steering Fluid	Dexron-IIe ATF
Manual Transaxle	SAE 75W-90W Or 75W-85W API
	Classification GL-4 Or Higher
Automatic Transaxle	Mopar 7176 ATF PLUS
Wheel Lug Nut Torque	
Polycast Steel Type	65-80 ft. lbs. (90-110 N.m)
Aluminum Wheels	85-100 ft. lbs. (120-140 N.m)
Fluid Capacities	
Application	(1) Quantity
Cooling System	8.45 Qts. (8.0L)
Automatic Transaxle	7.9 Qts. (7.5L)
Manual Transaxle	2.4 Qts. (2.3L)
Engine Oil	4.5 Qts. (4.3L)
Engine Oil (W/Oil Cooler)	4.9 Qts. (4.6L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	

90,000 MILE (144,000 KM) SERVICE

90,000 MILE (144,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Check Fluid Levels
	Check Cooling System Hoses and Clamps
	Check Coolant Strength
	Check Exhaust System & Heat Shielding
	Clean Battery and Battery Terminals
	Check C/V Joint Boots
	Check Steering Rack Boots
	Tension On Drive Belts
	Rear Axle (AWD) (Without LSD)
	Fuel Hoses
	Front Suspension Ball Joints (Lubricate)
	Suspension Bushings, Springs, Arms & Rear Jounce Bumpers
	Repack Front Wheel Bearings (2WD Models)
	Parking Brake System
	Lubricate Throttle/Kick-Down Cable Ball Stud
	Lubricate Steering Linkage & Suspension
	Inspect Front Brake Pads & Rotors
	Lubricate Caliper Slide Rails
	Inspect Rear Brake Linings & Drums
	Inspect Brake System Hoses & Lines
	Inspect Shocks/Struts for Leakage
	Inspect Tire Wear Pattern
	Rotate Tires and Adjust Air Pressure (Including Spare)
Replace	
	Engine Oil
	Oil Filter
	Air Filter Element

	Spark Plugs
	Automatic Transaxle Fluid
	Front & Rear Axle Oil (AWD)
	Drain, Flush and Refill Engine Coolant
Lubrication Specifications	
Application	Specification
Brake & Clutch Reservoir	Dot 3 Brake Fluid
Cooling System Fluid	50/50 Ethylene-Glycol/Water Mix
Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C)	SAE 20W-40 Or 20W-50 API SH/CD
Greater Than -10°F (-23°C)	SAE 10W-30, 10W-40 Or 10W-50 API SH/CD
Maximum Temperature	
Less Than 60°F (16°C)	SAE 5W-30 API SH/CD
Power Steering Fluid	Dexron-IIe ATF
Manual Transaxle	SAE 75W-90W Or 75W-85W API Classification GL-4 Or Higher
Automatic Transaxle	Mopar 7176 ATF PLUS
Rear Drive Axles	
Minimum Temperature	
More Than -10°F (-23°C)	SAE 90, 85W-90 Or 80W-90 API Classification GL-5 Or Higher
More Than -30°F to -10°F (-34°C to -23°C)	SAE 80W, Or 80W-90 API Classification GL-5 Or Higher
Maximum Temperature	
Less Than -30°F (-34°C)	SAE 75W API GL-5 Or Higher
Transfer Case	Mopar Hypoid Gear Oil Or Equivalent SAE 75W-90W Or 75W-85W API GL-4 Or Higher
Wheel Lug Nut Torque	
Polycast Steel Type	65-80 ft. lbs. (90-110 N.m)
Aluminum Wheels	85-100 ft. lbs. (120-140 N.m)
Fluid Capacities	
Application	(1) Quantity
Cooling System	8.45 Qts. (8.0L)
Automatic Transaxle	7.9 Qts. (7.5L)
Manual Transaxle	2.4 Qts. (2.3L)
Engine Oil	4.5 Qts. (4.3L)
Engine Oil (W/Oil Cooler)	4.9 Qts. (4.6L)
Transfer Case42 Qt. (.4L)
Differential (Rear Axle)	1.2 Qts. (1.1L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
Service Labor Times	
Application	Hours
3.0L DOHC Turbo	2.6

95,000 MILE (152,000 KM) SERVICE

95,000 MILE (152,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Check Fluid Levels
	Check Cooling System Hoses and Clamps
	Check Exhaust System & Heat Shielding
	Check Steering Rack Boots
	Inspect C/V Joint Boots
	Lubricate Steering Linkage & Suspension
	Rotate Tires and Adjust Air Pressure (Including Spare)
Replace	
	Engine Oil
	Oil Filter
Lubrication Specifications	
Application	Specification
Brake & Clutch Reservoir	Dot 3 Brake Fluid
Cooling System Fluid	50/50 Ethylene-Glycol/Water Mix
Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C)	SAE 20W-40 Or 20W-50 API SH/CD
Greater Than -10°F (-23°C)	SAE 10W-30, 10W-40 Or 10W-50 API SH/CD
Maximum Temperature	
Less Than 60°F (16°C)	SAE 5W-30 API SH/CD
Power Steering Fluid	Dexron-IIe ATF
Manual Transaxle	SAE 75W-90W Or 75W-85W API Classification GL-4 Or Higher
Automatic Transaxle	Mopar 7176 ATF PLUS
Wheel Lug Nut Torque	
Polycast Steel Type	65-80 ft. lbs. (90-110 N.m)
Aluminum Wheels	85-100 ft. lbs. (120-140 N.m)
Fluid Capacities	
Application	(1) Quantity
Cooling System	8.45 Qts. (8.0L)
Automatic Transaxle	7.9 Qts. (7.5L)
Manual Transaxle	2.4 Qts. (2.3L)
Engine Oil	4.5 Qts. (4.3L)
Engine Oil (W/Oil Cooler)	4.9 Qts. (4.6L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	

100,000 MILE (160,000 KM) SERVICE

100,000 MILE (160,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Check Fluid Levels
	Check Cooling System Hoses and Clamps
	Check Exhaust System & Heat Shielding
	Check C/V Joint Boots
	Check Operation of Horn, Wipers/Washers & All Exterior Lights
	Inspect Condition of Wiper Blades
	Check Headlight Alignment
	Check Seat Belt Webbing and Release Mechanisms
	Check Parking Brake Operation
	Check Shift/Clutch Interlock Operation
	Lubricate Weatherstripping with Silicone
	Lubricate Door Hinges
	Lubricate Door Locks
	Lubricate Suspension
Replace	
	Engine Oil
	Oil Filter
Lubrication Specifications	
Application	Specification
Brake & Clutch Reservoir	Dot 3 Brake Fluid
Cooling System Fluid	50/50 Ethylene-Glycol/Water Mix
Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C)	SAE 20W-40 Or 20W-50 API SH/CD
Greater Than -10°F (-23°C)	SAE 10W-30, 10W-40 Or 10W-50 API SH/CD
Maximum Temperature	
Less Than 60°F (16°C)	SAE 5W-30 API SH/CD
Power Steering Fluid	Dexron-IIe ATF
Manual Transaxle	SAE 75W-90W Or 75W-85W API
	Classification GL-4 Or Higher
Automatic Transaxle	Mopar 7176 ATF PLUS
Wheel Lug Nut Torque	

Polycast Steel Type	65-80 ft. lbs. (90-110 N.m)
Aluminum Wheels	85-100 ft. lbs. (120-140 N.m)
Fluid Capacities	
Application	(1) Quantity
Cooling System	8.45 Qts. (8.0L)
Automatic Transaxle	7.9 Qts. (7.5L)
Manual Transaxle	2.4 Qts. (2.3L)
Engine Oil	4.5 Qts. (4.3L)
Engine Oil (W/Oil Cooler)	4.9 Qts. (4.6L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	

105,000 MILE (168,000 KM) SERVICE

105,000 MILE (168,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Check Fluid Levels
	Check Cooling System Hoses and Clamps
	Check Coolant Strength
	Check Exhaust System & Heat Shielding
	Check Battery Fluid Level (SHO Only)
	Clean Battery and Battery Terminals
	Check C/V Joint Boots
	Check Steering Rack Boots
	Lubricate Steering Linkage & Suspension
	Inspect Front Brake Pads & Rotors
	Lubricate Caliper Slide Rails
	Inspect Rear Brake Linings & Drums
	Inspect Brake System Hoses & Lines
	Inspect Shocks/Struts for Leakage
	Inspect Tire Wear Pattern
	Rotate Tires and Adjust Air Pressure (Including Spare)
Replace	
	Engine Oil
	Oil Filter

Lubrication Specifications	
Application	Specification
Brake & Clutch Reservoir	Dot 3 Brake Fluid
Cooling System Fluid	50/50 Ethylene-Glycol/Water Mix
Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C)	SAE 20W-40 Or 20W-50 API SH/CD
Greater Than -10°F (-23°C)	SAE 10W-30, 10W-40 Or 10W-50 API SH/CD
Maximum Temperature	
Less Than 60°F (16°C)	SAE 5W-30 API SH/CD
Power Steering Fluid	Dexron-IIe ATF
Manual Transaxle	SAE 75W-90W Or 75W-85W API Classification GL-4 Or Higher
Automatic Transaxle	Mopar 7176 ATF PLUS
Rear Drive Axles	
Minimum Temperature	
More Than -10°F (-23°C)	SAE 90, 85W-90 Or 80W-90 API Classification GL-5 Or Higher
More Than -30°F to -10°F (-34°C to -23°C)	SAE 80W, Or 80W-90 API Classification GL-5 Or Higher
Maximum Temperature	
Less Than -30°F (-34°C)	SAE 75W API GL-5 Or Higher
Transfer Case	Mopar Hypoid Gear Oil Or Equivalent SAE 75W-90W Or 75W-85W API GL-4 Or Higher
Wheel Lug Nut Torque	
Polycast Steel Type	65-80 ft. lbs. (90-110 N.m)
Aluminum Wheels	85-100 ft. lbs. (120-140 N.m)
Fluid Capacities	
Application	(1) Quantity
Cooling System	8.45 Qts. (8.0L)
Automatic Transaxle	7.9 Qts. (7.5L)
Manual Transaxle	2.4 Qts. (2.3L)
Engine Oil	4.5 Qts. (4.3L)
Engine Oil (W/Oil Cooler)	4.9 Qts. (4.6L)
Transfer Case42 Qt. (.4L)
Differential (Rear Axle)	1.2 Qts. (1.1L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	

110,000 MILE (176,000 KM) SERVICE

110,000 MILE (176,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Check Fluid Levels
	Check Cooling System Hoses and Clamps

	Check Exhaust System & Heat Shielding
	Check C/V Joint Boots
	Check Operation of Horn, Wipers/Washers & All Exterior Lights
	Inspect Condition of Wiper Blades
	Check Headlight Alignment
	Check Seat Belt Webbing and Release Mechanisms
	Check Parking Brake Operation
	Check Shift/Clutch Interlock Operation
	Check Battery Fluid Level (SHO Only)
	Lubricate Weatherstripping with Silicone
	Lubricate Door Hinges
	Lubricate Door Locks
	Lubricate Suspension
	Replace
	Engine Oil
	Oil Filter
Lubrication Specifications	
Application	Specification
Brake & Clutch Reservoir	Dot 3 Brake Fluid
Cooling System Fluid	50/50 Ethylene-Glycol/Water Mix
Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C)	SAE 20W-40 Or 20W-50 API SH/CD
Greater Than -10°F (-23°C)	SAE 10W-30, 10W-40 Or 10W-50 API SH/CD
Maximum Temperature	
Less Than 60°F (16°C)	SAE 5W-30 API SH/CD
Power Steering Fluid	Dexron-IIe ATF
Manual Transaxle	SAE 75W-90W Or 75W-85W API Classification GL-4 Or Higher
Automatic Transaxle	Mopar 7176 ATF PLUS
Wheel Lug Nut Torque	
Polycast Steel Type	65-80 ft. lbs. (90-110 N.m)
Aluminum Wheels	85-100 ft. lbs. (120-140 N.m)
Fluid Capacities	
Application	(1) Quantity
Cooling System	8.45 Qts. (8.0L)
Automatic Transaxle	7.9 Qts. (7.5L)
Manual Transaxle	2.4 Qts. (2.3L)
Engine Oil	4.5 Qts. (4.3L)
Engine Oil (W/Oil Cooler)	4.9 Qts. (4.6L)

(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.

115,000 MILE (184,000 KM) SERVICE

115,000 MILE (184,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Check Fluid Levels
	Check Cooling System Hoses and Clamps
	Check Exhaust System & Heat Shielding
	Check Steering Rack Boots
	Inspect C/V Joint Boots
	Lubricate Steering Linkage & Suspension
	Rotate Tires and Adjust Air Pressure (Including Spare)
Replace	
	Engine Oil
	Oil Filter
Lubrication Specifications	
Application	Specification
Brake & Clutch Reservoir	Dot 3 Brake Fluid
Cooling System Fluid	50/50 Ethylene-Glycol/Water Mix
Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C)	SAE 20W-40 Or 20W-50 API SH/CD
Greater Than -10°F (-23°C)	SAE 10W-30, 10W-40 Or 10W-50 API SH/CD
Maximum Temperature	
Less Than 60°F (16°C)	SAE 5W-30 API SH/CD
Power Steering Fluid	Dexron-IIe ATF
Manual Transaxle	SAE 75W-90W Or 75W-85W API
	Classification GL-4 Or Higher
Automatic Transaxle	Mopar 7176 ATF PLUS
Wheel Lug Nut Torque	
Polycast Steel Type	65-80 ft. lbs. (90-110 N.m)
Aluminum Wheels	85-100 ft. lbs. (120-140 N.m)
Fluid Capacities	
Application	(1) Quantity
Cooling System	8.45 Qts. (8.0L)
Automatic Transaxle	7.9 Qts. (7.5L)
Manual Transaxle	2.4 Qts. (2.3L)
Engine Oil	4.5 Qts. (4.3L)
Engine Oil (W/Oil Cooler)	4.9 Qts. (4.6L)

(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.

120,000 MILE (192,000 KM) SERVICE

120,000 MILE (192,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Check Fluid Levels
	Check Cooling System Hoses and Clamps
	Check Coolant Strength
	Check Exhaust System & Heat Shielding
	Clean Battery and Battery Terminals
	Tension On Drive Belts
	Check C/V Joint Boots
	Check Steering Rack Boots
	Rear Axle (AWD Without LSD)
	Evap. Emission Control System
	Fuel System
	Front Suspension Ball Joints (Lubricate)
	Suspension Bushings, Springs, Arms & Rear Jounce Bumpers
	Repack Front Wheel Bearings (2WD Models)
	Parking Brake System
	Lubricate Throttle/Kick-Down Cable Ball Stud
	Lubricate Steering Linkage & Suspension
	Inspect Front Brake Pads & Rotors
	Lubricate Caliper Slide Rails
	Inspect Rear Brake Linings & Drums
	Inspect Brake System Hoses & Lines
	Inspect Shocks/Struts for Leakage
	Inspect Tire Wear Pattern
	Rotate Tires and Adjust Air Pressure (Including Spare)
	Replace

Engine Oil
Oil Filter
Air Filter Element
Spark Plugs
Ignition Cables
Automatic Transaxle Fluid
Front & Rear Axle Oil (AWD)
Drain, Flush and Refill Engine Coolant

Lubrication Specifications

Application	Specification
Brake & Clutch Reservoir	Dot 3 Brake Fluid
Cooling System Fluid	50/50 Ethylene-Glycol/Water Mix
Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C)	SAE 20W-40 Or 20W-50 API SH/CD
Greater Than -10°F (-23°C)	SAE 10W-30, 10W-40 Or 10W-50 API SH/CD
Maximum Temperature	
Less Than 60°F (16°C)	SAE 5W-30 API SH/CD
Power Steering Fluid	Dexron-IIe ATF
Manual Transaxle	SAE 75W-90W Or 75W-85W API
	Classification GL-4 Or Higher
Automatic Transaxle	Mopar 7176 ATF PLUS
Rear Drive Axles	
Minimum Temperature	
More Than -10°F (-23°C)	SAE 90, 85W-90 Or 80W-90 API
	Classification GL-5 Or Higher
More Than -30°F to -10°F	
(-34°C to -23°C)	SAE 80W, Or 80W-90 API
	Classification GL-5 Or Higher
Maximum Temperature	
Less Than -30°F (-34°C)	SAE 75W API GL-5 Or Higher
Transfer Case	Mopar Hypoid Gear Oil Or Equivalent
	SAE 75W-90W Or 75W-85W API GL-4 Or Higher
Wheel Lug Nut Torque	
Polycast Steel Type	65-80 ft. lbs. (90-110 N.m)
Aluminum Wheels	85-100 ft. lbs. (120-140 N.m)

Fluid Capacities

Application	(1) Quantity
Cooling System	8.45 Qts. (8.0L)
Automatic Transaxle	7.9 Qts. (7.5L)
Manual Transaxle	2.4 Qts. (2.3L)
Engine Oil	4.5 Qts. (4.3L)
Engine Oil (W/Oil Cooler)	4.9 Qts. (4.6L)
Transfer Case42 Qt. (.4L)
Differential (Rear Axle)	1.2 Qts. (1.1L)

(1) - Capacities are recommended or calculated levels. Always use

dipstick (if available) to measure level.	
Service Labor Times	
Application	Hours
3.0L DOHC Turbo	8.5

LUBRICATION SPECIFICATIONS

LUBRICATION SPECIFICATIONS TABLE

Application	Specification
Brake & Clutch Reservoir	DOT 3 Brake Fluid
Cooling System Fluid	50/50 Ethylene-Glycol/Water Mix
Engine Oil	
Minimum Temperature	
Greater Than 32°F (0°C)	SAE 20W-40 Or 20W-50 API SH/CD
Greater Than -10°F (-23°C)	SAE 10W-30, 10W-40 Or 10W-50 API SH/CD
Maximum Temperature	
Less Than 60°F (16°C)	SAE 5W-30 API SH/CD
Power Steering Fluid	Dexron-IIe ATF
Manual Transaxle	SAE 75W-90W Or 75W-85W API Classification GL-4 Or Higher
Automatic Transaxle	Mopar 7176 ATF PLUS
Rear Drive Axles	
Minimum Temperature	
More Than -10°F (-23°C)	SAE 90, 85W-90 Or 80W-90 API Classification GL-5 Or Higher
More Than -30°F to -10°F (-34°C to -23°C)	SAE 80W, Or 80W-90 API Classification GL-5 Or Higher
Maximum Temperature	
Less Than -30°F (-34°C)	SAE 75W API Classification GL-5 Or Higher
Transfer Case	Mopar Hypoid Gear Oil Or Equivalent SAE 75W-90W Or 75W-85W API Classification GL-4 Or Higher

FLUID CAPACITIES

FLUID CAPACITIES TABLE (1)

Application	Quantity
A/C System R-12 Refrigerant Capacity	
1991-92	34 Ozs.
1993	29 Ozs.
A/C System R-134a Refrigerant Capacity	
1994-95	29 Ozs.
Cooling System	8.45 Qts. (8.0L)
Automatic Transaxle.....	7.9 Qts. (7.5L)
Manual Transaxle	2.4 Qts. (2.3L)
Transfer Case42 Qt. (.4L)
Differential (Rear Axle)	1.2 Qts. (1.1L)
Engine Oil	4.5 Qts. (4.3L)
Engine Oil (W/Oil Cooler)	4.9 Qts. (4.6L)
Fuel Tank	19.8 Gals. (75L)

Power Steering (2WS) 0.95 Qts. (0.9L)
Power Steering (4WS) 1.6 Qts. (1.5L)

- (1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.
 - (2) - Use of R-12 in a R-134a system will cause SEVERE DAMAGE.
-